


ASSEMBLY INSTRUCTIONS

Portable assembly

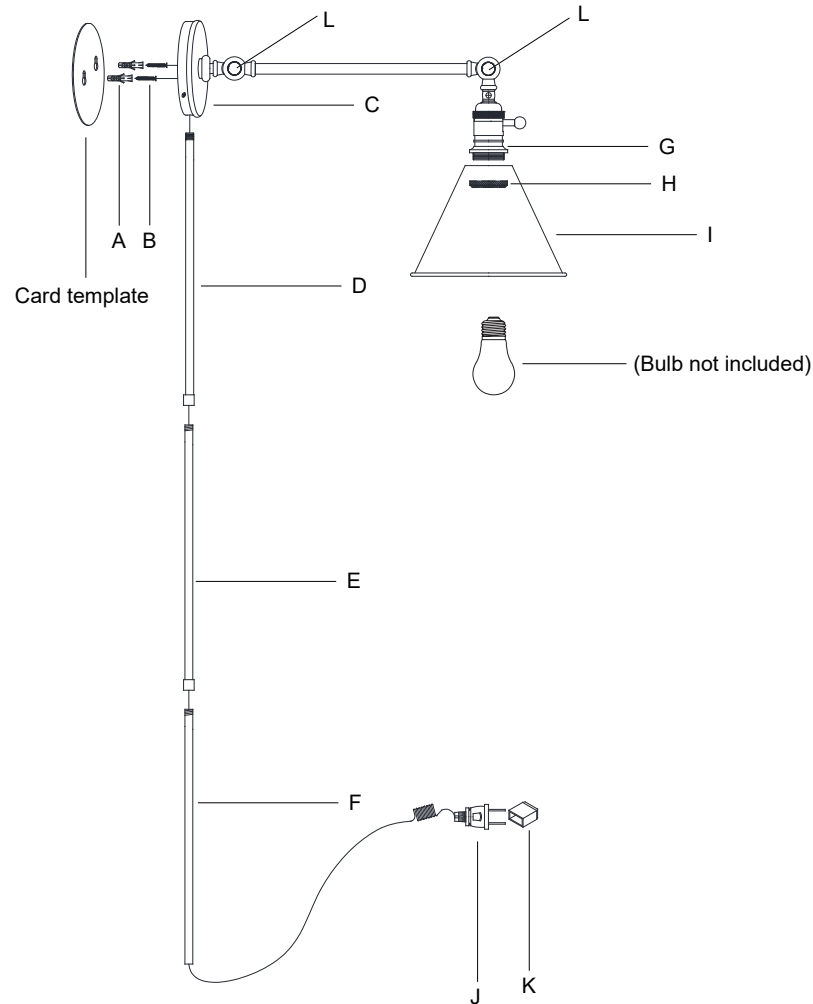

Boston Functional Single Arm Library Light

Item# SL2922

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING*SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT. DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

NOTE: CAREFULLY UNPACK EACH PIECE IN TOP LAYER OF PACKING PRIOR TO REMOVING. RETAIN ALL PACKING MATERIAL UNTIL INSPECTION AND INSTALLATION ARE FINAL.

1. Carefully remove all parts from the box.
2. Put the card template to the desired location and mark the key hole points on the wall.
3. Remove the card template and drill holes on the wall and insert the anchors (A) into the holes.
4. Insert the wood screws (B) to the anchors (A) and leave the threads 1/8" out.
5. Hook the fixture base (C) to the wood screws (B).
6. Install the cord cover rod (D) to the fixture base (C), then install the rod (E) to the rod (D).
7. Remove the socket ring (H) from the socket (G), attach the shade (I) to the socket (G) and secure with the socket ring (H).
8. Insert bulb (not included) into the socket.
9. To adjust the fixture shade loosen the adjustment knobs (L), adjust to desired position, then lock tight knobs (L).
10. Remove the protective plug cover (K) from the plug (J).
11. Plug into a proper electrical outlet and test the fixture.

