

KOSA 13 & 18 FLUSH MOUNTS

702FMKOSA18; 702FMKOSA13

General Product Information



STANDARD
INSTALLATION

INDOOR



DRY LOCATION

INTEGRATED LED
NO BULBS REQUIRED

DIMMABLE
(LED, ELV, TRIAC & 10V)

PLEASE SEE
visualcomfort.com
FOR PRODUCT
SPECS



CLEAN WITH SOFT,
DRY CLOTH ONLY. NO
HARSH CHEMICALS!

SAVE THESE
INSTRUCTIONS!



Product Warranty EU

Product Warranty UK

Suggested/Required Tools



ELECTRIC DRILL



PHILLIPS-HEAD
SCREWDRIVER



WIRE CUTTER

Safety Information

CAUTION-RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

USE MINIMUM 90°C SUPPLY CONDUCTORS.

DISPOSAL




Do not dispose of electrical appliances as unsorted municipal waste, use separate collection facilities. Contact your local government for information regarding the collection systems available. If electrical appliances are disposed of in landfills or dumps, hazardous substances can leak into the groundwater and get into the food chain, damaging your health and well-being.



Turn off electrical current at the source before working with any lighting fixture or portable lamp.
Install and use this product in adherence with building regulations/local electrical codes.



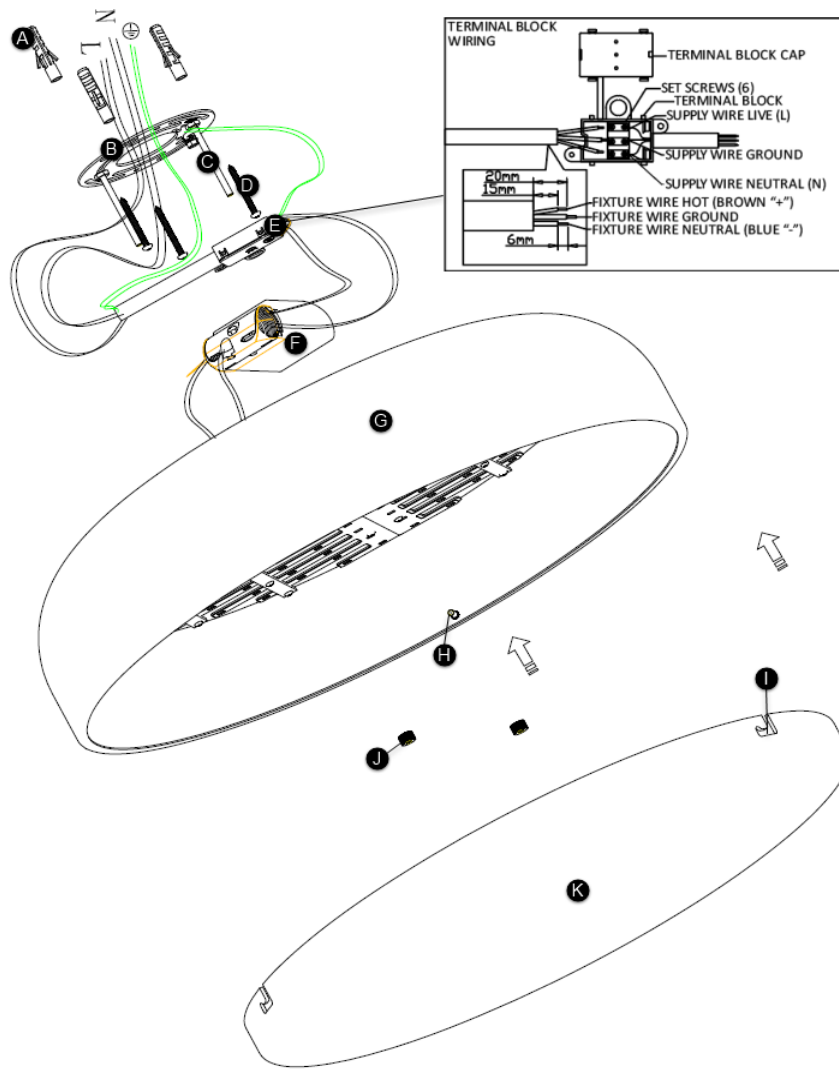

FIXTURE PARTS

- A. Anchors
- B. Mounting Plate
- C. Mounting Studs
- D. Mounting Screws
- E. Terminal Block
- F. Driver
- G. Fixture
- H. Key
- I. Key Slot
- J. Knurled Nuts
- K. Diffuser

INSTRUCTIONS

I. Preparing the Fixture

1. Separate the mounting plate from the fixture by removing the knurled nuts.
2. Using the Phillips-head screwdriver, install the mounting plate to the ceiling (ensure there's an available mains connection) with the provided mounting screws.

II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with building regulations/local electrical codes, connect the fixture ground wire (green or yellow wire) to suitable ground. This may be a green ground screw on the mounting plate or an earth wire (green or yellow).
3. Connect the following pairs of wires together using a terminal block to secure a connection:
 - a) Live driver wire (brown) and live power line wire (brown) from the source
 - b) Neutral driver wire (blue) and neutral power line wire (blue) from the source
4. Ensure that the terminal block is capped off.
5. Neatly tuck the driver and all the wires into the fixture base.

III. Installing the Fixture

1. Line up the mounting studs to the fixture holes and gently push up so the mounting studs go through the holes in the fixture. Then secure the mounting studs in place by screwing on the knurled nuts.
2. Align the key slots on the diffuser to the keys on the fixture. To finish, push the diffuser onto the keys and rotate it to lock it in place.